


Call **800.959.0299** to speak with a sales representative or visit us on the web at www.analyticaltechnology.com



Chlorine Dioxide Transmitter

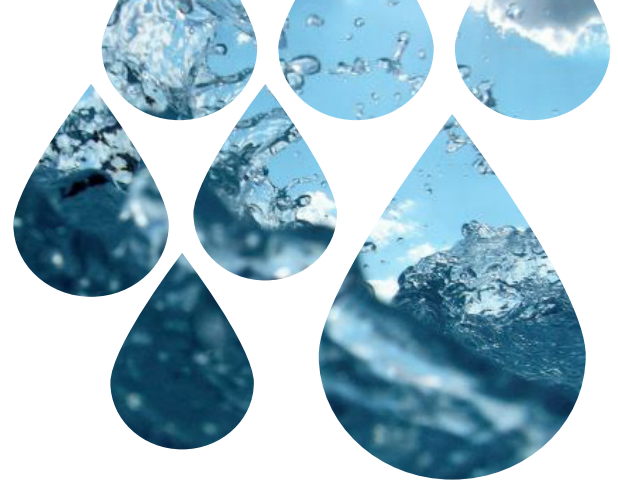

Model Q45H/65

ATI's Chlorine Dioxide Transmitter is designed for on-line monitoring and control of industrial disinfection systems. Chlorine Dioxide is a powerful disinfecting agent used to treat potable water, cooling water, and food processing wash water. To ensure proper disinfection while minimizing disinfection by-products, the concentration of disinfectant must be precisely maintained.

The Chlorine Dioxide system features a unique membrane-covered polarographic sensor that does not require the addition of chemical reagents. All that's needed is a constant flow of water across the face of the sensor, and this is provided by a simple constant-head flowcell. The sample water is unaffected by the measurement and can be safely discharged back into the process.

The Q45H system has no moving parts, so there are no pumps or motors that burn out or tubing breaks that create maintenance nightmares. All normal maintenance items are included with each system. This model system responds to chlorine dioxide with minimal interference from any residual chlorine that may be present.

Applications

Potable Water Treatment
Poultry Processing
Cooling Towers

Food Wash Water
Wastewater Treatment
Paper Mills

Features

- Low maintenance membraned sensor
- Loop-Powered or battery-operation
- External 5-17 VDC version for solar power applications
- Interference-free measurement
- Measurement from 0-200 ppb to 0-200 ppm
- Constant-head flowcell simplifies operation
- Sealed flowcell option for recirculation systems
- Large, easy-to-read LCD display
- Clear, menu-driven user interface
- NEMA 4X (IP-66) enclosure
- Wall or pipe mounting bracket standard
- Built-in PID controller

Sensor Options



Sealed Flowcell



Constant Head Flowcell



Submersible Sensor

Model Q45H/65 SPECIFICATIONS

ELECTRONIC TRANSMITTER

Display Range	0-200 ppb; 0-2.000, 0-20.00, 0-200.0 ppm or mg/l
Accuracy	±0.5% of selected range or 0.02 ppm
Repeatability	0.3% of selected range or 0.01 ppm
Sensitivity	0.05% of selected range
Linearity	0.1% of selected range
Temperature Drift	0.1% of span/°C
Sensor Type	2E Amperometric (Polarographic) membraned sensor
Temperature Input	Pt100 in sensor for temperature compensation
Power	2-Wire unit: 17-30 VDC, 25 mA maximum Battery unit: Two AA Alkaline batteries External DC: 5-17 VDC, 10 mA maximum
Analog Outputs	2-Wire unit: Single 4-20 mA DC, 450 ohms maximum Battery unit: Two 0-2.5 VDC, 50K ohms minimum External DC: Two 0-2.5 VDC, 50K ohms minimum
Output Isolation	600 V Galvanic isolation
Enclosure	NEMA 4X (IP-66) Polycarbonate, V-0 flammability
Mounting Options	Wall or pipe mounting bracket supplied
Conduit Entries	Two PG-9 cord grips, 0.16-0.31" diameter cable
Ambient Temperature	Operating: -40° to + 60°C Storage: -40° to + 70°C
Ambient Humidity	0-95%, Non-condensing
Size	4.4"H x 4.4"W x 3.5"D (111 x 111 x 90 mm)
Weight	2-Wire or External DC unit: 1 lb (0.45 Kg) Battery unit: 2 lbs (0.9 Kg)
Certifications	CE marked to BS EN 61326-1:2006 Standard UL and CSA General Purpose

SENSOR & FLOWCELL SPECIFICATIONS

Chlorine Dioxide Sensor	Membrane-covered Amperometric (Polarographic)
Optional pH Sensor	pH sensor, with or without preamplifier
Materials	PVC & 316 stainless steel
Response Time	90% in 60 seconds
Temperature Limits	0-50°C
Pressure Limit	0-50 psig
Sensor Cable	25 ft. (7.5 m) standard
Sensor Flowcell	Clear acrylic constant-head overflow or sealed acrylic flowcell
Sample Flow rate	7-15 GPH (0.5-1.0 LPM)

ORDERING INFORMATION

Model Q45H/65-A-B-C Chlorine Dioxide Transmitter

Suffix A - Power

- 1 - 24 VDC, 2-wire (single output only)
- 4 - Battery operated with two 0-2.5 VDC outputs
- 5 - External 5-17 VDC with two 0-2.5 VDC outputs

Suffix B - Sensor Style

- 1 - Sensor with constant head flowcell and 25' cable
- 2 - Submersible sensor with 25' cable
- 3 - Sensor with sealed low-volume flowcell
- 4 - Sensor with 1-1/2" Flow "T"
- 5 - Sensor with sealed flowcell

Suffix C - pH Sensor Input

- 1 - None
- 2 - Q22 pH sensor with battery preamp, 25' cable
- 3 - Standard pH sensor with 25' cable & adapter for overflow cell
- 4 - Standard pH sensor with 25' cable & sealed flowcell

ACCESSORIES

- 07-0100** Universal junction box, NEMA 4X
- 31-0001** 5-c sensor interconnect cable, max. 100 ft. (ClO₂ only)
- 31-0038** 7-c sensor interconnect cable, max. 100 ft. (ClO₂ / pH systems)
- 00-0628** Mounting bracket kit for submersible sensor
- 00-0930** Monitor pipe mounting bracket kit
- 00-0570** Chlorine Dioxide polarizer, flow cell style
- 00-0571** Chlorine Dioxide polarizer, submersible style
- 47-0005** 2" U-bolt, 304SS
- 55-0048** Fixed flow regulator, 400 cc/min., 1/4" inlet & outlet
- 03-0372** Fixed flow regulator assembly, 400 cc/min., 1/4" inlet & outlet

NOTES:

- 1 - All systems are supplied with one package of membranes, one 120 cc bottle of electrolyte, and one spare parts kit containing 3 each of all o-rings and special screws.
- 2 - Flowcell for ClO₂ systems should be kept within 25 feet of monitor.
- 3 - Pipe mount requires two 2" U-bolts (47-0005).

B / Q45H65 / R-1 (11/2014)

Analytical Technology, Inc.
6 Iron Bridge Drive
Collegeville, PA 19462
Phone 610.917.0991
Toll-Free 800.959.0299
Fax 610.917.0992
Email sales@analyticaltechnology.com

Analytical Technology
Unit 1 & 2 - Gatehead Business Park
Delph New Road, Delph
Saddleworth OL3 5DE
Phone 01457 873 318
Fax 01457 874 468
Email sales@atiuk.com

Represented by:



Visit Us on the Web: www.analyticaltechnology.com